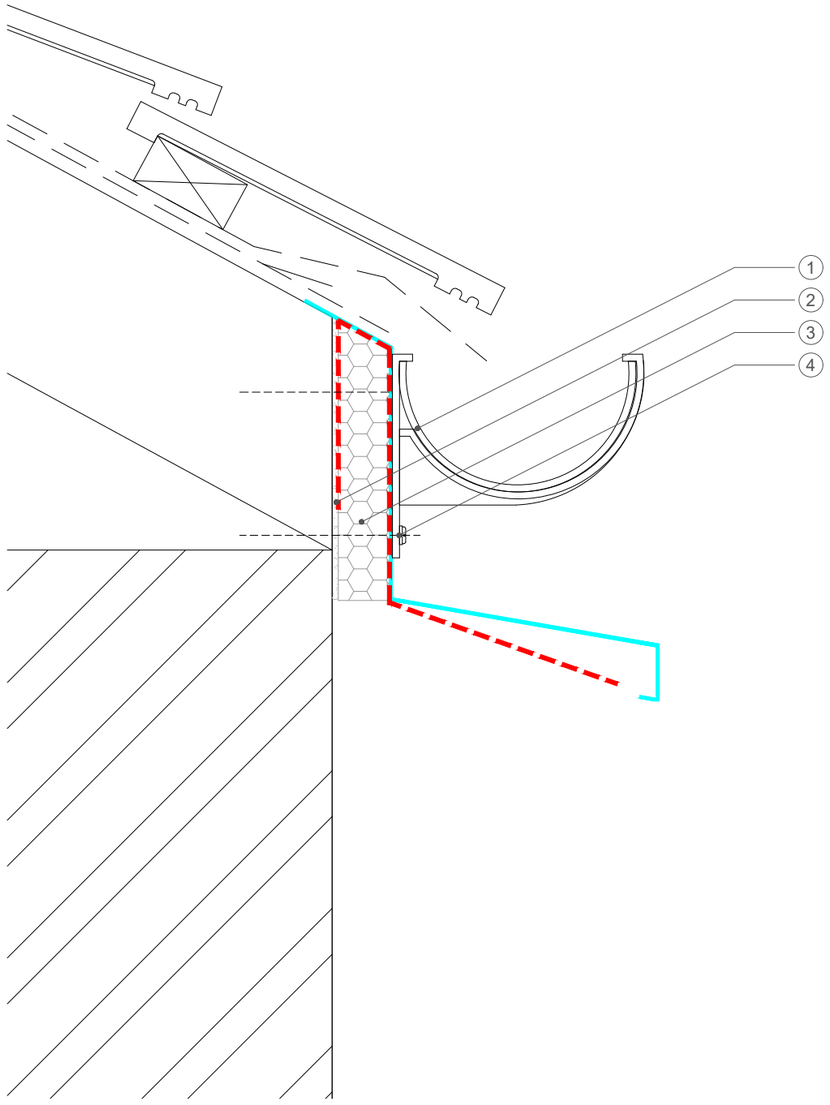

Section: at Eaves (Stage 1)

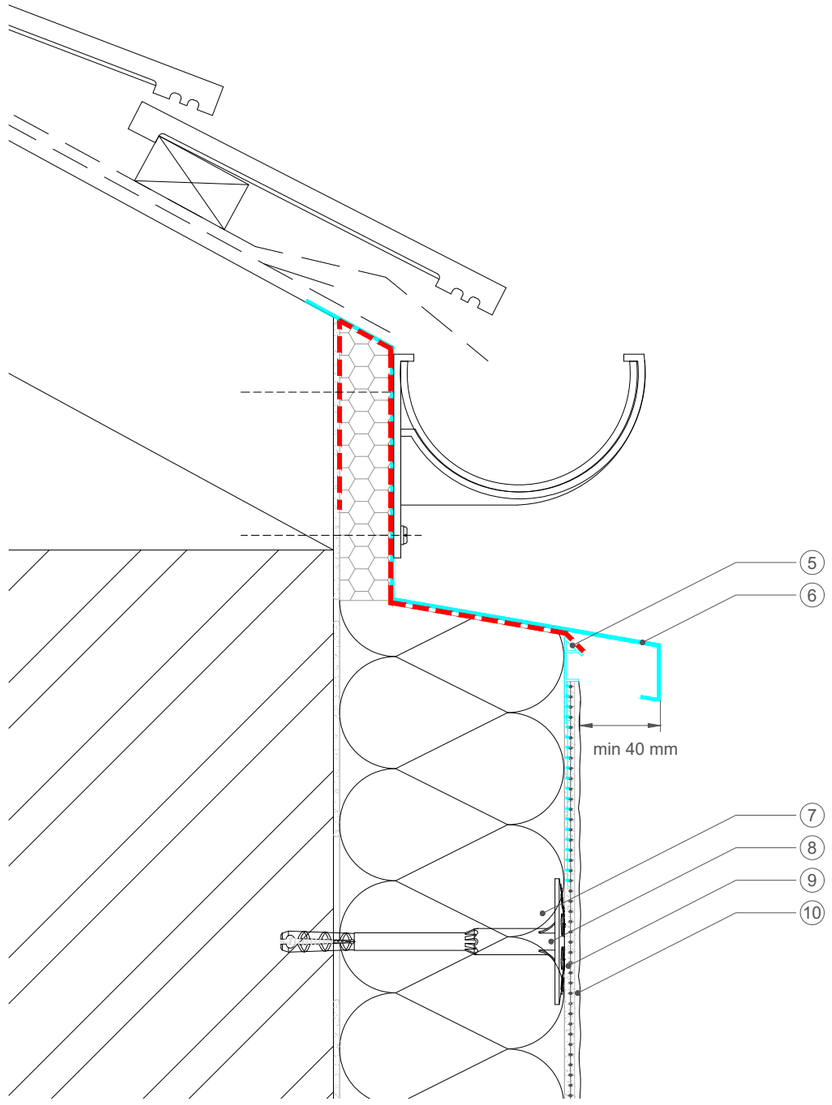

Section: at Eaves (Stage 2)

1. Gutter and roofline closure system to be fixed through to the underlying substrate. Care should be taken not to distort the face of the profiles
2. Membrane bonded to the back of insulation and underside of the profile, laid over the sealing strip of Permarock BEA/LX-ATP/RLCB Connecting Bead
3. Rigid insulation board (min R = 0.6m^{2}K/W), adhesively bonded
4. PPC aluminium flashing fixing (300 ctrs) with screw cover caps
5. Permarock BEA/LX-ATP/RLCB Connecting Bead
6. PPC aluminium flashing (thickness and dimensions subject to specification and client requirements)
7. Permarock Insulation (thickness and type to specification) on Permarock Adhesive
8. Permarock Insulation Fixing
9. Permarock Bedding Mortar incorporating Permarock Reinforcing Mesh
10. Permarock Decorative Finish

NOTE: Existing fascia board and gutter to be removed. Then install new fascia profile and reinstall new/existing guttering

Where applicable all dimensions and details should be read in conjunction with specialist consultants drawings and the project specification.

All dimensions should be checked on site by the contractor and any discrepancies should be brought to the attention of Permarock Products Ltd.

This drawing is the copyright of Permarock Products Ltd. It shall not be copied to any other third party without the express written consent of Permarock Products Ltd.

DISCLAIMER: Whilst this information/document/proposal (together "Information") is based on the latest manufacturer facts and findings of which we are aware, we are not engaged as a designer or other contractor in respect of your project and so the Information is general in nature and we cannot guarantee that any Information provided meets all of your specific project requirements. Given this, we cannot guarantee that any products selected, specified and/or purchased by you and their proposed applications are fit for the intended purpose. Any specification or purchase by you is at your own risk and we recommend the Information be reviewed and approved by an appropriately qualified professional prior to specification or purchase. Without prejudice to the generality of the foregoing, you (or the appropriately qualified professional from whom you seek advice) shall ensure that any performance criteria and/or coverage rates quoted can be achieved in each instance when compiling or pricing specific projects. To the extent permitted by law, Permarock will not be liable (whether in contract, tort (including negligence), breach of duty, misrepresentation or otherwise) for any loss or liability (of whatsoever kind) arising out of or in connection with any Information we may provide.

Notes :

Rev	Date	Amendments	By	Approved

Permarock Products Ltd.
Jubilee Drive
Loughborough
Leicestershire
LE11 5TW
Tel: (01509) 262924
Email: permarock@permarock.com
Web: www.permarock.com

Client : -

Project : PAS 2030/2035: 2019 Compliant Projects

Project Ref : -

Title : Insulated Roof Closure Fascia Profile - Eaves Detail

Drawn By : HN	Approved By : RWT
Date : 30/01/2026	Original Size : A3
Scale : NTS	
Drawing No : PAS-RCS003A	Rev.