System Termination with Full System Stop Bead

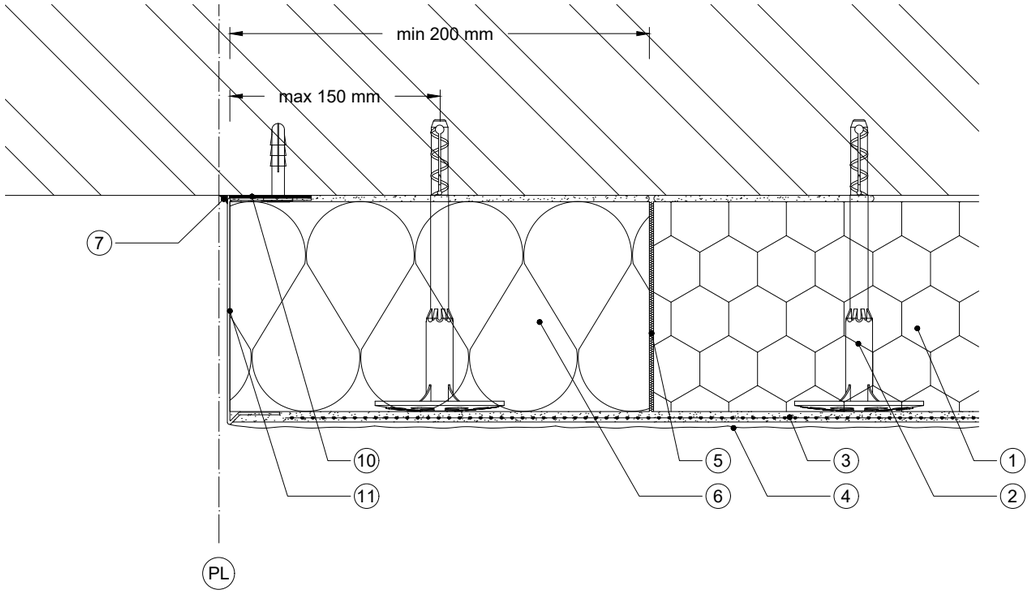

Isometric Detail 1

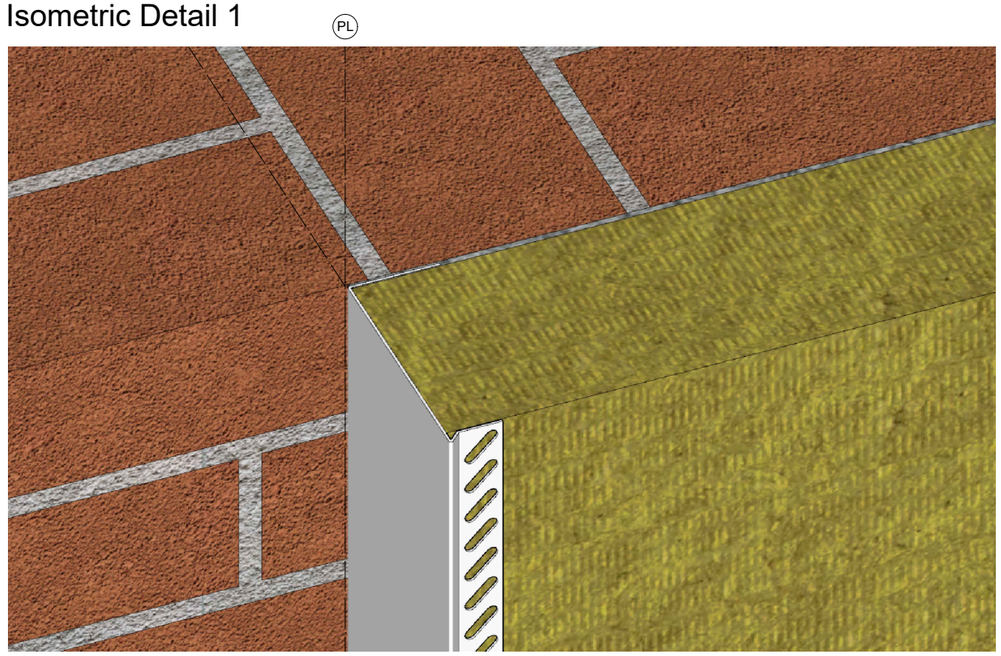

NOTE :
1. As standard, full system stop beads are supplied as pre-coated aluminium to RAL 9010 (white). Other RAL colours are available to special order.
2. Uneven wall surfaces may require levelling prior to attachment of the system.
3. If Permarock EPS-Premium is used, a separate 200 mm wide fire barrier is required at (6).

EPS systems only - with building regulations height restrictions

(1) Permarock EPS-Premium insulation on Permarock Adhesive

(2) Permarock Insulation Fixing

(3) Permarock Bedding Mortar incorporating Permarock Reinforcing Mesh

(4) Permarock Decorative Finish

(5) Insulation boards to be tightly butted at all joints, all gaps to be filled.
Permarock EPS-Premium to be filled with Permarock B1 Foam.
Permarock Mineral Fibre insulation to be filled with slivers of mineral fibre

(6) Permarock Mineral Fibre Insulation, min 200mm wide, fully adhesively bonded mechanically fixed forming vertical fire barrier at party wall*

(7) Permarock Corner Bead COR/PL/M or COR/AL/M fixed to wall by embedment in Permarock Adhesive or Permarock Bedding Mortar

(8) Permarock Corner Bead COR/PL/M or COR/AL/M, see PAS-C001

(9) Permarock Silicone Sealant

(10) Permarock Sealing Tape SEA/TP610/3-6 to seal full system stop bead to wall face

(11) Permarock Full System Stop Bead mechanically fixed with Permarock Profile Fixings at max 300 mm cts. Adjacent sections interconnected with Permarock Full System Joint Clip

* Supplementary mechanical fixing of fire barrier insulation in addition to adhesive bonding is permissible.

Where applicable all dimensions and details should be read in conjunction with specialist consultants drawings and the project specification.

All dimensions should be checked on site by the contractor and any discrepancies should be brought to the attention of Permarock Products Ltd.

This drawing is the copyright of Permarock Products Ltd. It shall not be copied to any other third party without the express written consent of Permarock Products Ltd.

DISCLAIMER: Whilst this information/document/proposal (together "Information") is based on the latest manufacturer facts and findings of which we are aware, we are not engaged as a designer or other contractor in respect of your project and so the Information is general in nature and we cannot guarantee that any Information provided meets all of your specific project requirements. Given this, we cannot guarantee that any products selected, specified and/or purchased by you and their proposed applications are fit for the intended purpose. Any specification or purchase by you is at your own risk and we recommend the Information be reviewed and approved by an appropriately qualified professional prior to specification or purchase. Without prejudice to the generality of the foregoing, you (or the appropriately qualified professional from whom you seek advice) shall ensure that any performance criteria and/or coverage rates quoted can be achieved in each instance when compiling or pricing specific projects. To the extent permitted by law, Permarock will not be liable (whether in contract, tort (including negligence), breach of duty, misrepresentation or otherwise) for any loss or liability (of whatsoever kind) arising out of or in connection with any Information we may provide.

Notes :

Rev	Date	Amendments	By	Approved

Permarock Products Ltd.
Jubilee Drive
Loughborough
Leicestershire
LE11 5TW
Tel: (01509) 262924
Email: permarock@permarock.com
Web: www.permarock.com

Client : -

Project : PAS 2030/2035: 2019 Compliant Projects

Project Ref : -

Title : Vertical Edge Terminations - Thin Coat Render Systems (4) (EPS ONLY)

Drawn By : HN	Approved By : RWT
Date : 15/05/2025	Original Size : A3
Scale :	NTS
Drawing No : PAS-T001D	Rev.