Elevation

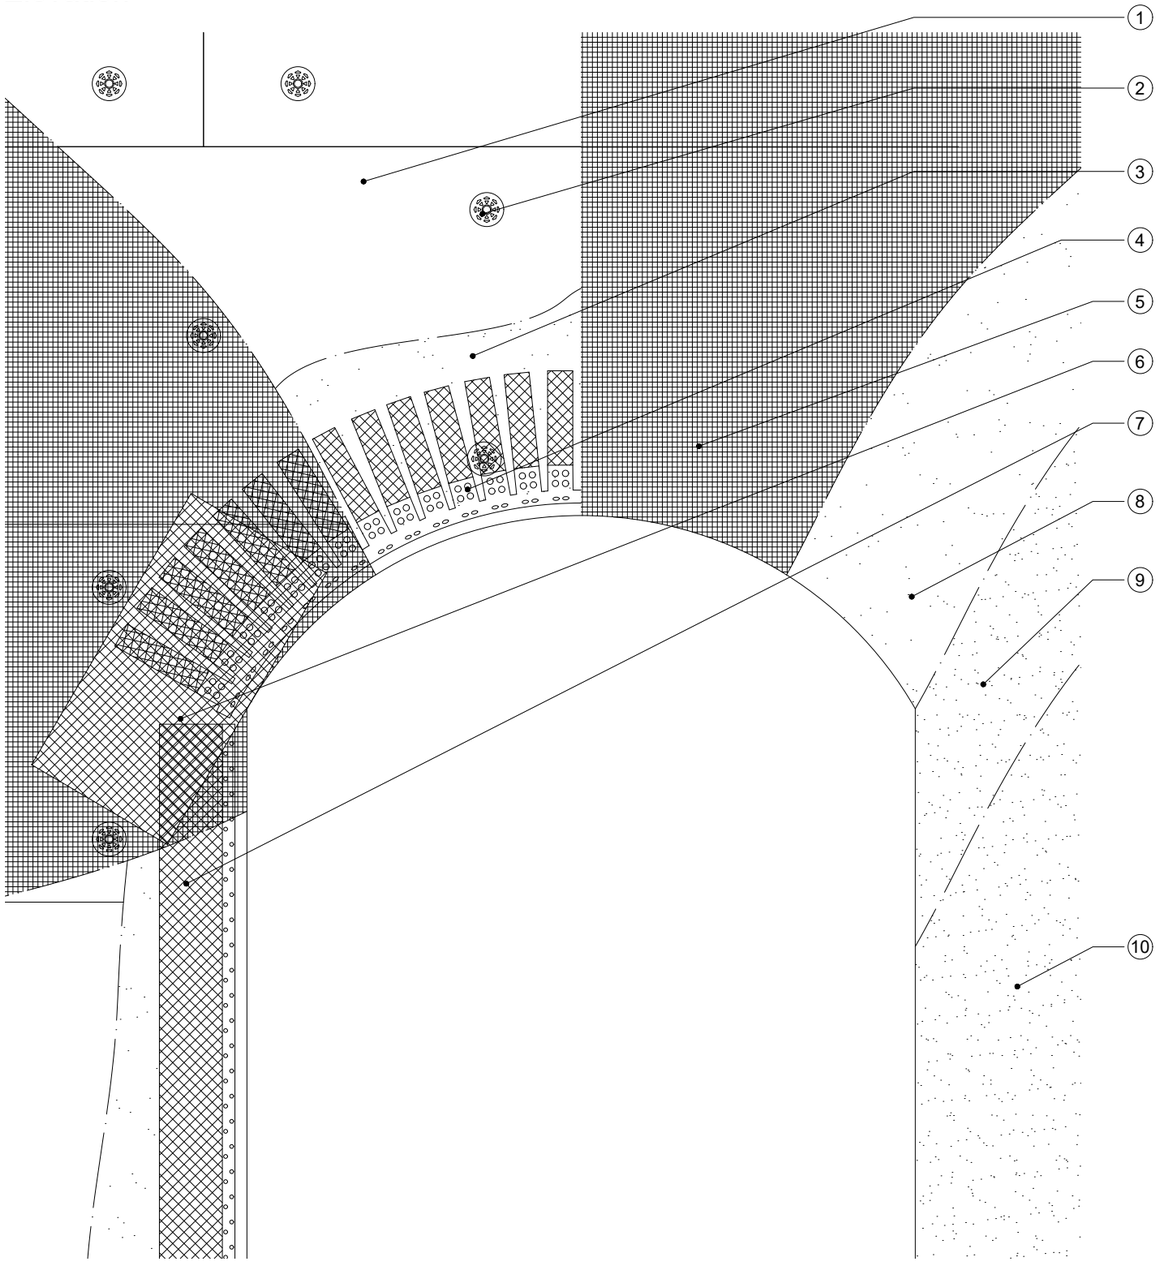

NOTE :
1. Reinforcement fixing omitted in drawing for clarity, subject to specification where needed.
2. Reinforcing mesh 'stress patches' applied into Permarock Bedding Mortar after main wall reinforcement has been applied.
3. Stress patches to be taken right up to the corner.

1. Permarock Insulation (type and thickness to specification) on Permarock Adhesive
2. Permarock Insulation Fixing
3. Base coat of Permarock Bedding Mortar
4. Permarock Arch Corner Bead COR/LK-KL embedded into base layer of basecoat
5. Reinforcement layer comprising Permarock Bedding Mortar + Permarock Reinforcing Mesh in accordance with specification
6. Permarock Reinforcing Mesh 'Stress Patch' 500 mm x 250 mm at all corners
7. Permarock Corner Bead COR/PL/M
8. Second coat of Permarock Bedding Mortar (sponge float finish)
9. Permarock K+R Primer
10. Permarock K-Finish

Where applicable all dimensions and details should be read in conjunction with specialist consultants drawings and the project specification.

All dimensions should be checked on site by the contractor and any discrepancies should be brought to the attention of Permarock Products Ltd.

This drawing is the copyright of Permarock Products Ltd. It shall not be copied to any other third party without the express written consent of Permarock Products Ltd.

DISCLAIMER: Whilst this information/document/proposal (together "Information") is based on the latest manufacturer facts and findings of which we are aware, we are not engaged as a designer or other contractor in respect of your project and so the Information is general in nature and we cannot guarantee that any Information provided meets all of your specific project requirements. Given this, we cannot guarantee that any products selected, specified and/or purchased by you and their proposed applications are fit for the intended purpose. Any specification or purchase by you is at your own risk and we recommend the Information be reviewed and approved by an appropriately qualified professional prior to specification or purchase. Without prejudice to the generality of the foregoing, you (or the appropriately qualified professional from whom you seek advice) shall ensure that any performance criteria and/or coverage rates quoted can be achieved in each instance when compiling or pricing specific projects. To the extent permitted by law, Permarock will not be liable (whether in contract, tort (including negligence), breach of duty, misrepresentation or otherwise) for any loss or liability (of whatsoever kind) arising out of or in connection with any Information we may provide.

Notes :

Rev	Date	Amendments	By	Approved

Permarock Products Ltd.
Jubilee Drive
Loughborough
Leicestershire
LE11 5TW
Tel: (01509) 262924
Email: permarock@permarock.com
Web: www.permarock.com

Client : -

Project : PAS 2030/2035: 2019 Compliant Projects

Project Ref : -

Title : Arched Render at Ginnel Entrance, Door or window Head

Drawn By : HN	Approved By : RWT
Date : 15/05/2025	Original Size : A3
Scale :	NTS
Drawing No : PAS-W006	Rev.