NOTE : 1. Reinforcing mesh 'stress patches' applied into Permarock Bedding Mortar after main wall reinforcement has been applied.
2. Stress patches to be taken right up to the corner.

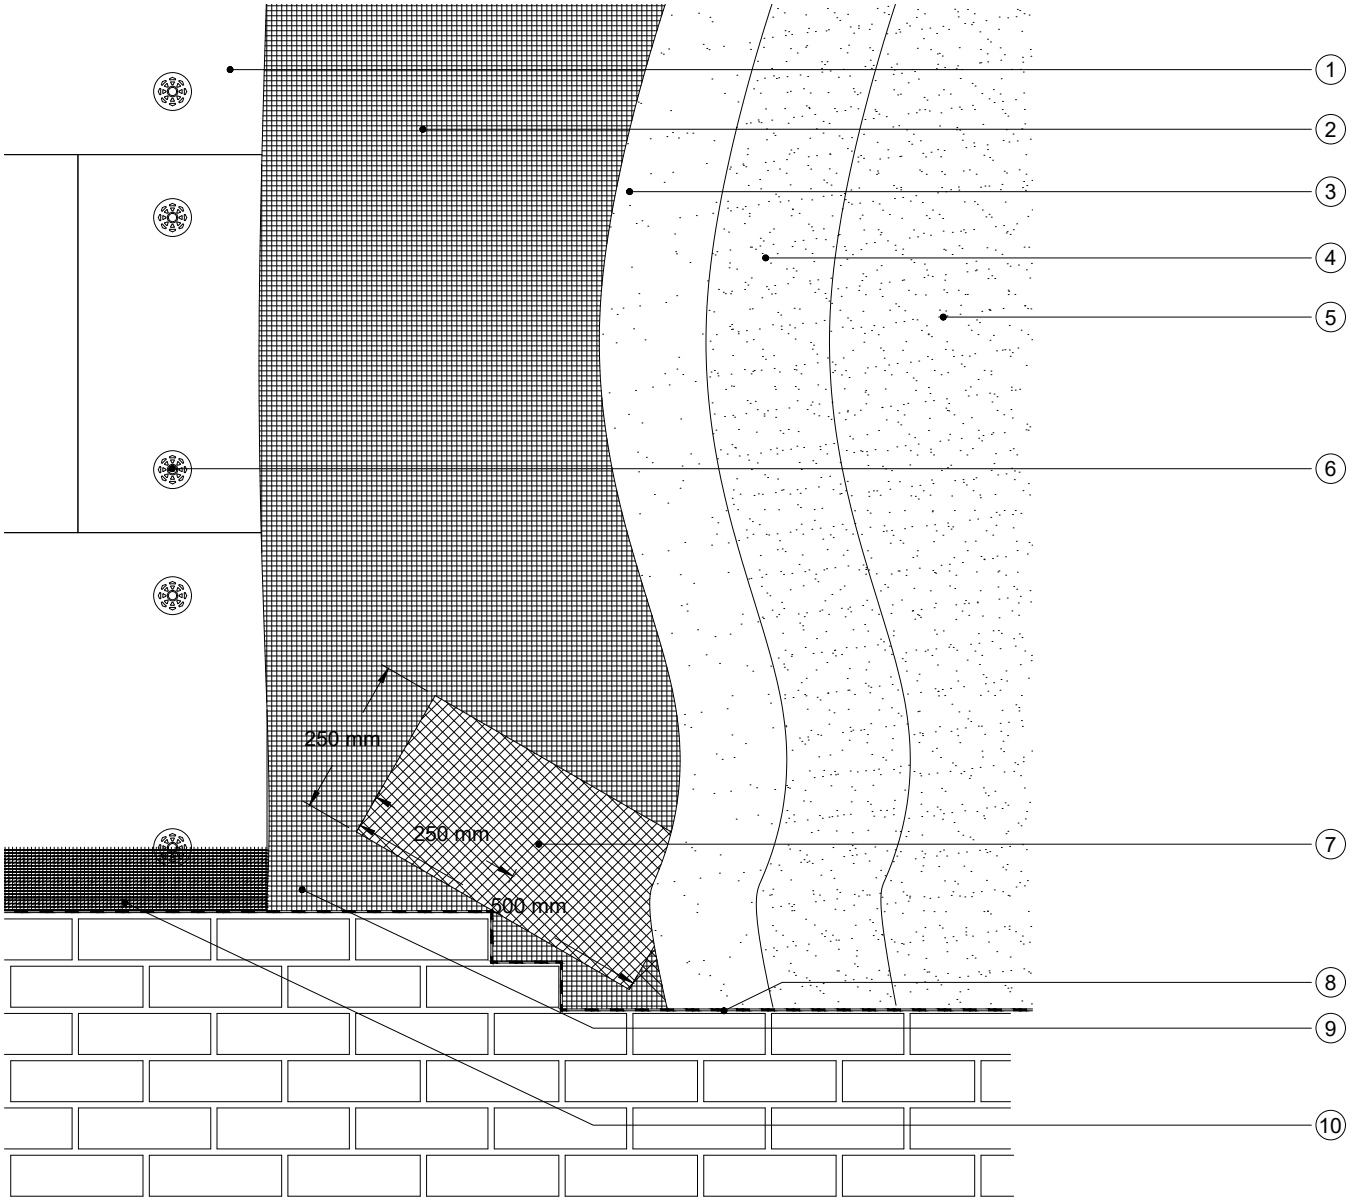

1. Permarock Insulation (type and thickness to specification) on Permarock Adhesive
2. Reinforcement layer comprising Permarock Bedding Mortar + Permarock Reinforcing Mesh
3. Second coat of Permarock Bedding Mortar (sponge float finish)
4. Permarock K+R Primer
5. Permarock Decorative Finish
6. Permarock Insulation Fixing
7. Permarock Reinforcing Mesh 'Stress Patch' 500mm x 250mm at all corners
8. DPC
9. Reinforcing mesh overlaps clip-on drip-edge bead on starter track
10. Permarock Starter Track with clip-on drip-edge bead. Starter track mechanically fixed with Permarock Profile Fixings at max 300 mm cts. Permarock Distance Spacers at fixing points to maintain line as required.

permarock PRODUCTS LTD

Permarock Products Ltd.
Jubilee Drive
Loughborough
Leicestershire
LE11 5TW
Tel: (01509) 262924
Email: permarock@permarock.com
Web: www.permarock.com

Client : -	Title : Part Elevation of Base of System - Stepped DPC		Drawn By : TYY	Approved By : JFR
Project : Standard Detail	Project Ref : -		Scale : NTS	Date : 08/01/2016
Notes :	Rev / Date / Amendments / By / Approved		Original Size : A4	Rev.
			Drawing No : B008	

Where applicable all dimensions and details should be read in conjunction with specialist consultants drawings and the project specification. All dimensions should be checked on site by the contractor and any discrepancies should be brought to the attention of Permarock Products Ltd.
This drawing is the copyright of Permarock Products Ltd. It shall not be copied to any other third party without the express written consent of Permarock Products Ltd.
DISCLAIMER: Whilst this information/document/proposal (together "Information") is based on the latest manufacturer facts and findings of which we are aware, we are not engaged as a designer or other contractor in respect of your project and so the Information is general in nature and we cannot guarantee that any Information provided meets all of your specific project requirements. Given this, we cannot guarantee that any products selected, specified and/or purchased by you and their proposed applications are fit for the intended purpose. Any specification or purchase by you is at your own risk and we recommend the Information be reviewed and approved by an appropriately qualified professional prior to specification or purchase. Without prejudice to the generality of the foregoing, you (or the appropriately qualified professional from whom you seek advice) shall ensure that any performance criteria and/or coverage rates quoted can be achieved in each instance when compiling or pricing specific projects. To the extent permitted by law, Permarock will not be liable (whether in contract, tort (including negligence), breach of duty, misrepresentation or otherwise) for any loss or liability (of whatsoever kind) arising out of or in connection with any Information we may provide.